



CMO

4G/Multiband MIMO Puck Antenna

Features

- Low Profile Puck Antenna
- 2 x 4G/LTE/Multiband elements
- Fully Waterproof when mounted

Specifications

	Element 1	Element 2
Frequency range	690-800 / 800-960 / 1710-2170 / 2500-2700 MHz	690-800 / 800-960 / 1710-2170 / 2500-2700 MHz
Peak gain	1 / 2.5 / 3.8 / 5 dBi	1 / 2.5 / 3.7 / 5 dBi
Polarisation	Linear	Linear
VSWR	<3.0:1	<2.5:1
Power rating	10 W	10W
Impedance	50 Ohms	50 Ohms
Dimensions	102 x 33.5mm (dxh)	


Ordering Options

FCMO35303-SMSM-1K	CMO antenna with 2 x 1M RG174 and SMA-Male
FCMO35303-SMSM-2K	CMO antenna with 2 x 2M RG174 and SMA-Male



CMO | 4G/LTE/Multiband MIMO Puck Antenna

Element 1 VSWR

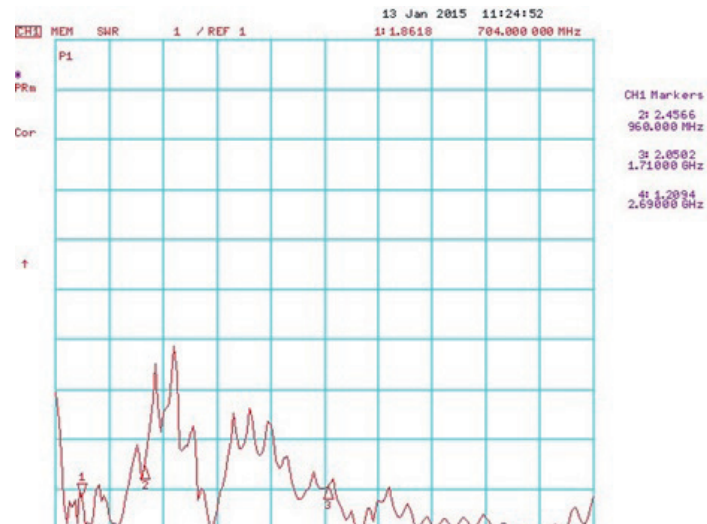

Element 2 VSWR

